




PLAN

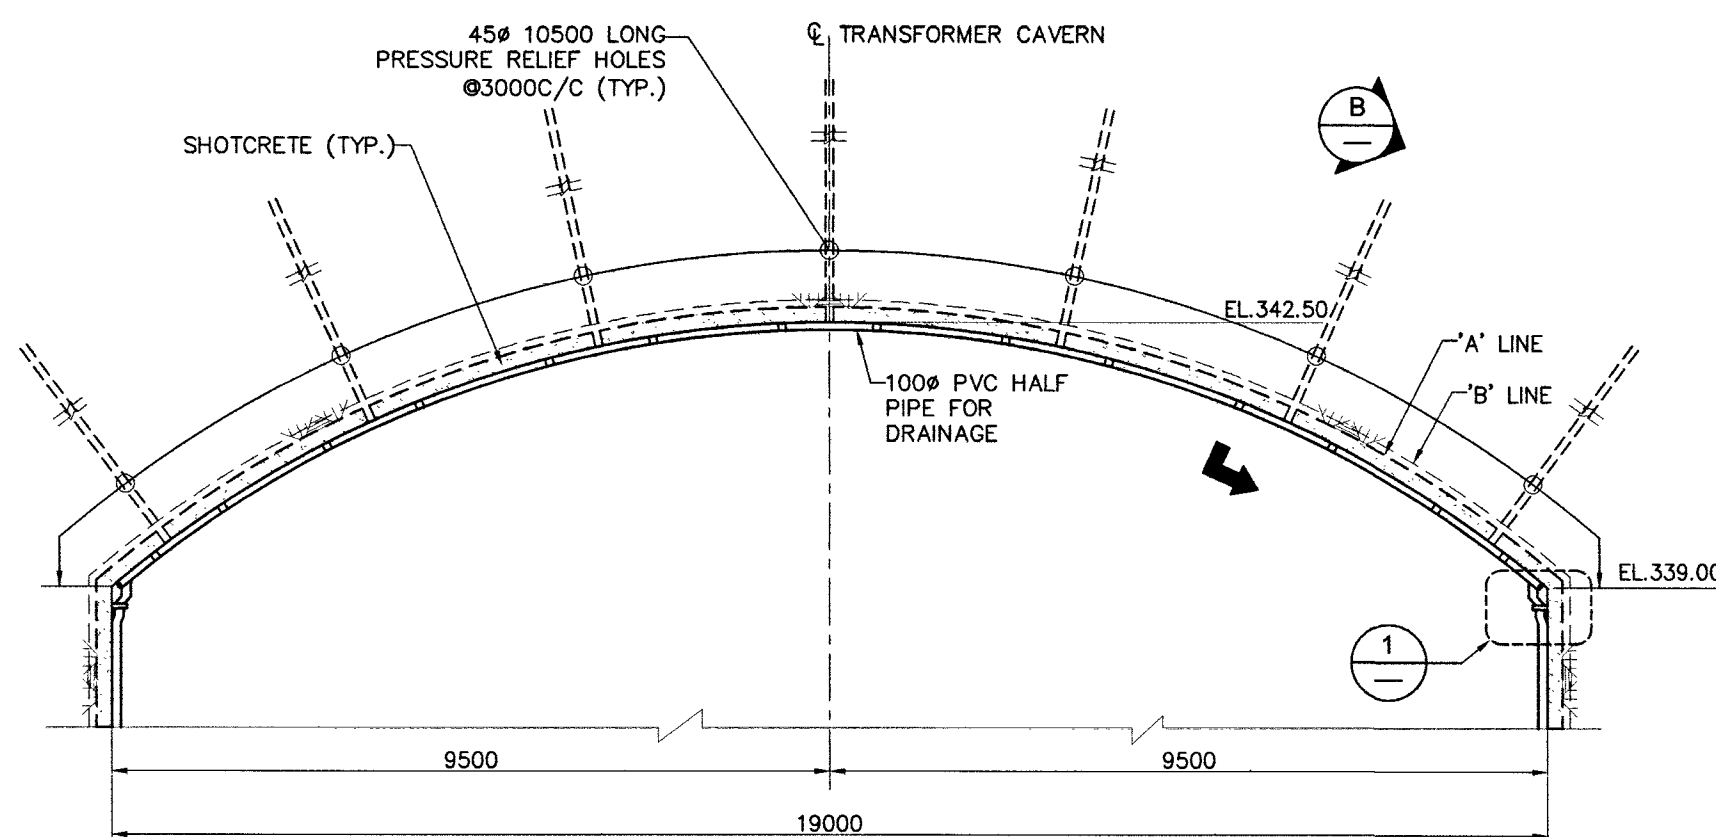

TYPICAL CROSS-SECTION A-A

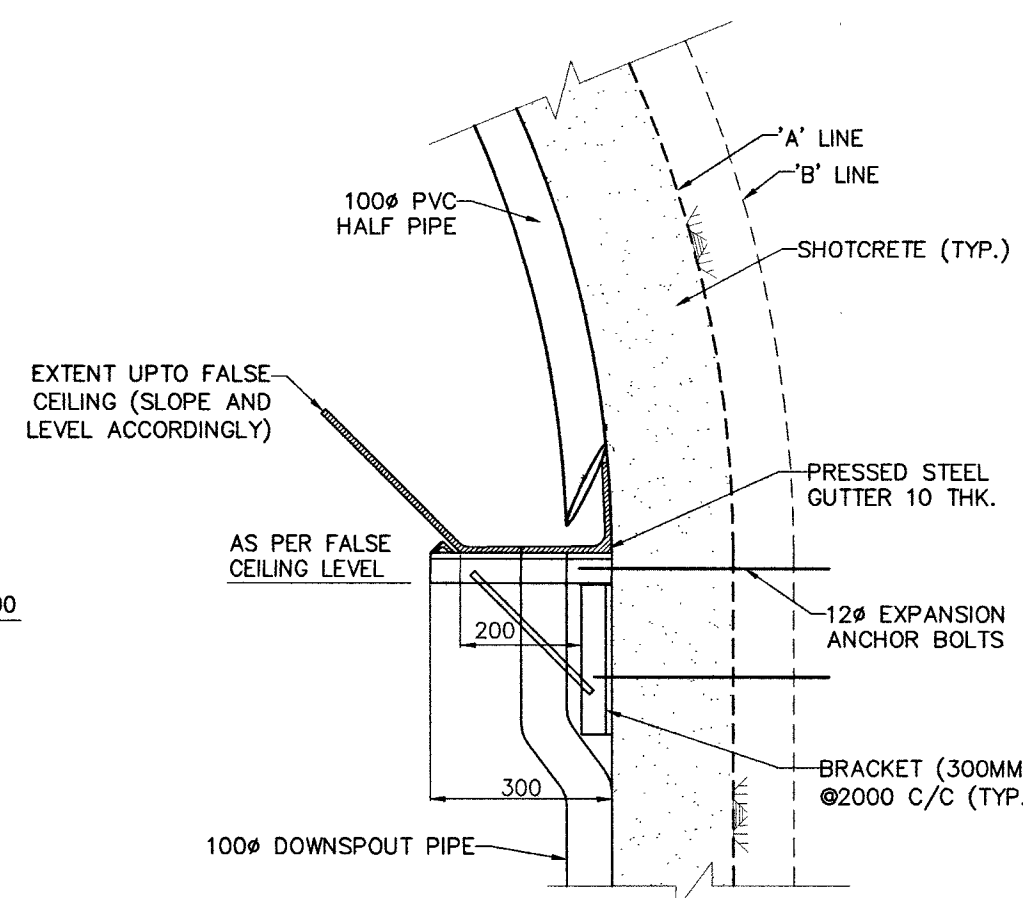

DETAIL 1 (NTS)

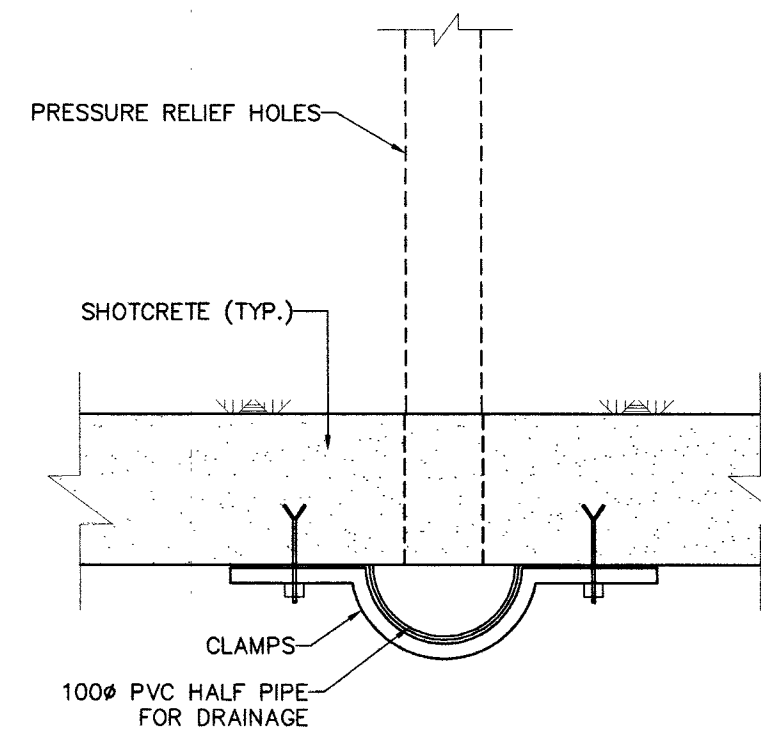

SECTION B-B (NTS)


NOTES:

1. सभी माप मिलीमीटर में तथा ऊंचाई मीटर में दिए गए हैं।
2. THIS DRAWING IS ISSUED FOR DRAINAGE ARRANGEMENT OF TRANSFORMER CAVERN. FOR DETAILS OF PRESSURE RELIEF HOLES & DRAINAGE ARRANGEMENT OF WALLS REFER SEPARATE DRAWINGS.
3. THE DEFINITION OF 'A' AND 'B' LINE SHALL BE AS PER SECTION B.3 OF TECHNICAL SPECIFICATIONS.
4. THE PVC HALF PIPES SHALL BE FIXED AT THE LOCATION OF PRESSURE RELIEF HOLES BY MEANS OF CLAMPS AND SHALL BE SEALED WITH MORTAR TO PREVENT LEAKAGE.
5. THE LOCATION OF PVC HALF PIPES SHOWN ARE INDICATIVE AND SHALL BE ADJUSTED TO THE ACTUAL LOCATION OF PRESSURE RELIEF HOLES.
6. THE ELEVATION OF GUTTER AS SHOWN IN THE DRAWING SHALL BE BELOW THE FALSE CEILING AND TO BE DECIDED BY ENGINEER-IN-CHARGE AS PER SECTION B.15.8 OF TECHNICAL SPECIFICATION.
7. THE PVC PIPE SHALL CONFIRM TO SECTION B.16 OF TECHNICAL SPECIFICATION.
8. THE PRESSURE RELIEF HOLES SHALL BE CLEANED BEFORE INSTALLATION OF DRAINAGE PIPE.
9. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRAWING NO. NHDB-4GC4-41-DD-1003, 1004 AND 7001.

REFERENCE DRAWING:

1. NHDB-4GC4-41-DD-1003
2. NHDB-4GC4-41-DD-1004
3. NHDB-4GC4-41-DD-7001

SCALE:-



एन एच पी सी लिमिटेड (एन एच पी सी लिमिटेड का एक नगरपालिका कर्म) NHPC Limited (A GOVT. OF BIHAR ENTERPRISE)	
दिबांग बहुउद्देशीय परियोजना DIBANG MULTIPURPOSE PROJECT	
TRANSFORMER CAVERN CROWN - DRAINAGE ARRANGEMENT PLAN AND SECTIONS	
DATE 28.05.2025	NO. 00
ISSUED FOR CONSTRUCTION	
DATE	NO.
REVISION OR ISSUES	BY. CH. APP.
DESIGN MEMO NO. 00	डिजाइन मेमो संख्या
DATE MAY. 2025	DRG. NO. NHDB 4GC4 41 DD 1007 00
डिजाइन संख्या	