
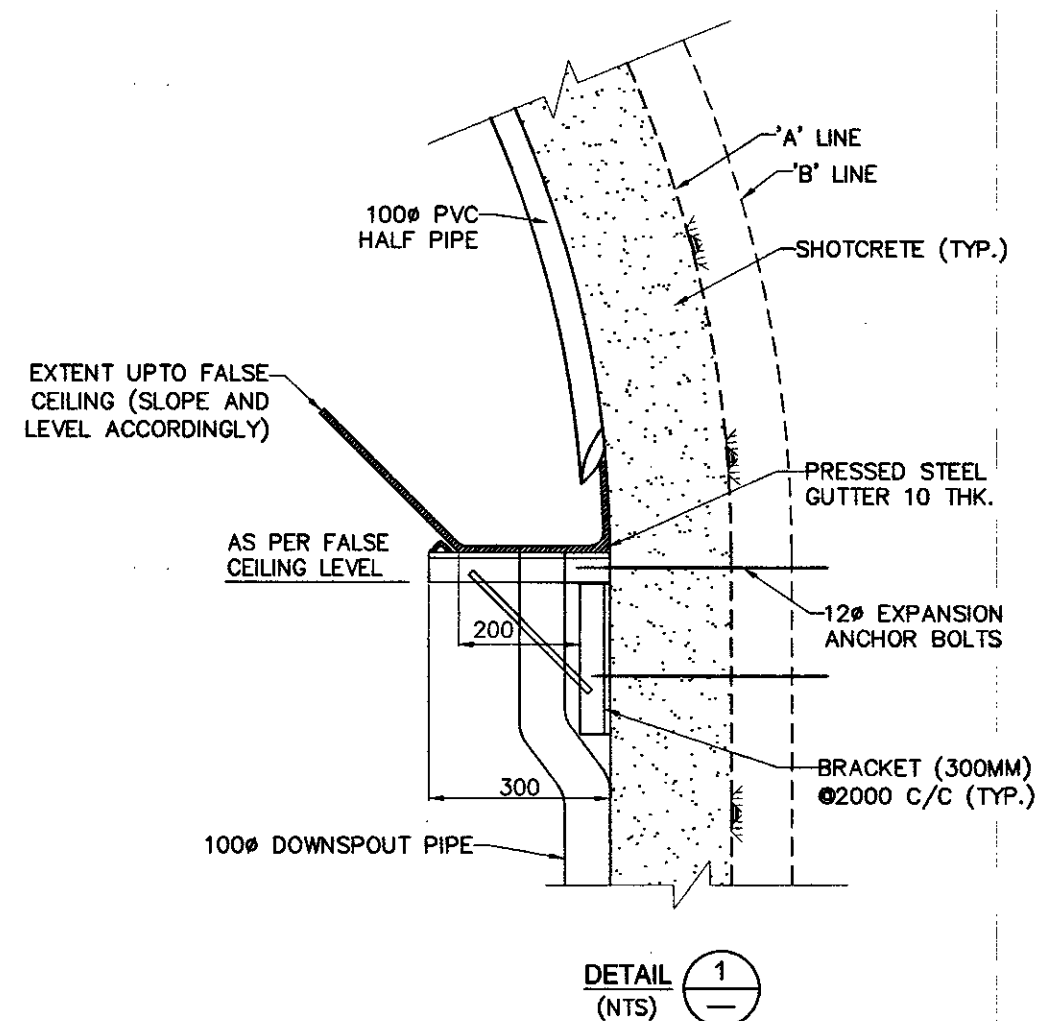


#### NOTES:

- सभी माप मिलीमीटर में तथा ऊंचाई मीटर में दिए गए हैं।  
ALL DIMENSIONS ARE IN MILLIMETRE AND ELEVATIONS ARE IN METRE.
- THIS DRAWING IS ISSUED FOR DRAINAGE ARRANGEMENT OF MIV CAVERN CROWN. FOR DETAILS OF PRESSURE RELIEF HOLES & DRAINAGE ARRANGEMENT OF WALLS REFER SEPARATE DRAWINGS.
- THE DEFINITION OF 'A' AND 'B' LINE SHALL BE AS PER SECTION B.3 OF TECHNICAL SPECIFICATIONS.
- THE PVC HALF PIPES SHALL BE FIXED AT THE LOCATION OF PRESSURE RELIEF HOLES BY MEANS OF CLAMPS AND SHALL BE SEALED WITH MORTAR TO PREVENT LEAKAGE.
- THE LOCATION OF PVC HALF PIPES SHOWN ARE INDICATIVE AND SHALL BE ADJUSTED TO THE ACTUAL LOCATION OF PRESSURE RELIEF HOLES.
- THE ELEVATION OF GUTTER AS SHOWN IN THE DRAWING SHALL BE BELOW THE FALSE CEILING AND TO BE DECIDED BY ENGINEER-IN-CHARGE AS PER SECTION B.15.8 OF TECHNICAL SPECIFICATION.
- THE PVC PIPE SHALL CONFIRM TO SECTION B.16 OF TECHNICAL SPECIFICATION.
- THE PRESSURE RELIEF HOLES SHALL BE CLEANED BEFORE INSTALLATION OF DRAINAGE PIPE.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH DRAWING NO. NHDB-4FC4-41-DD-1002, 1003 & 7001.

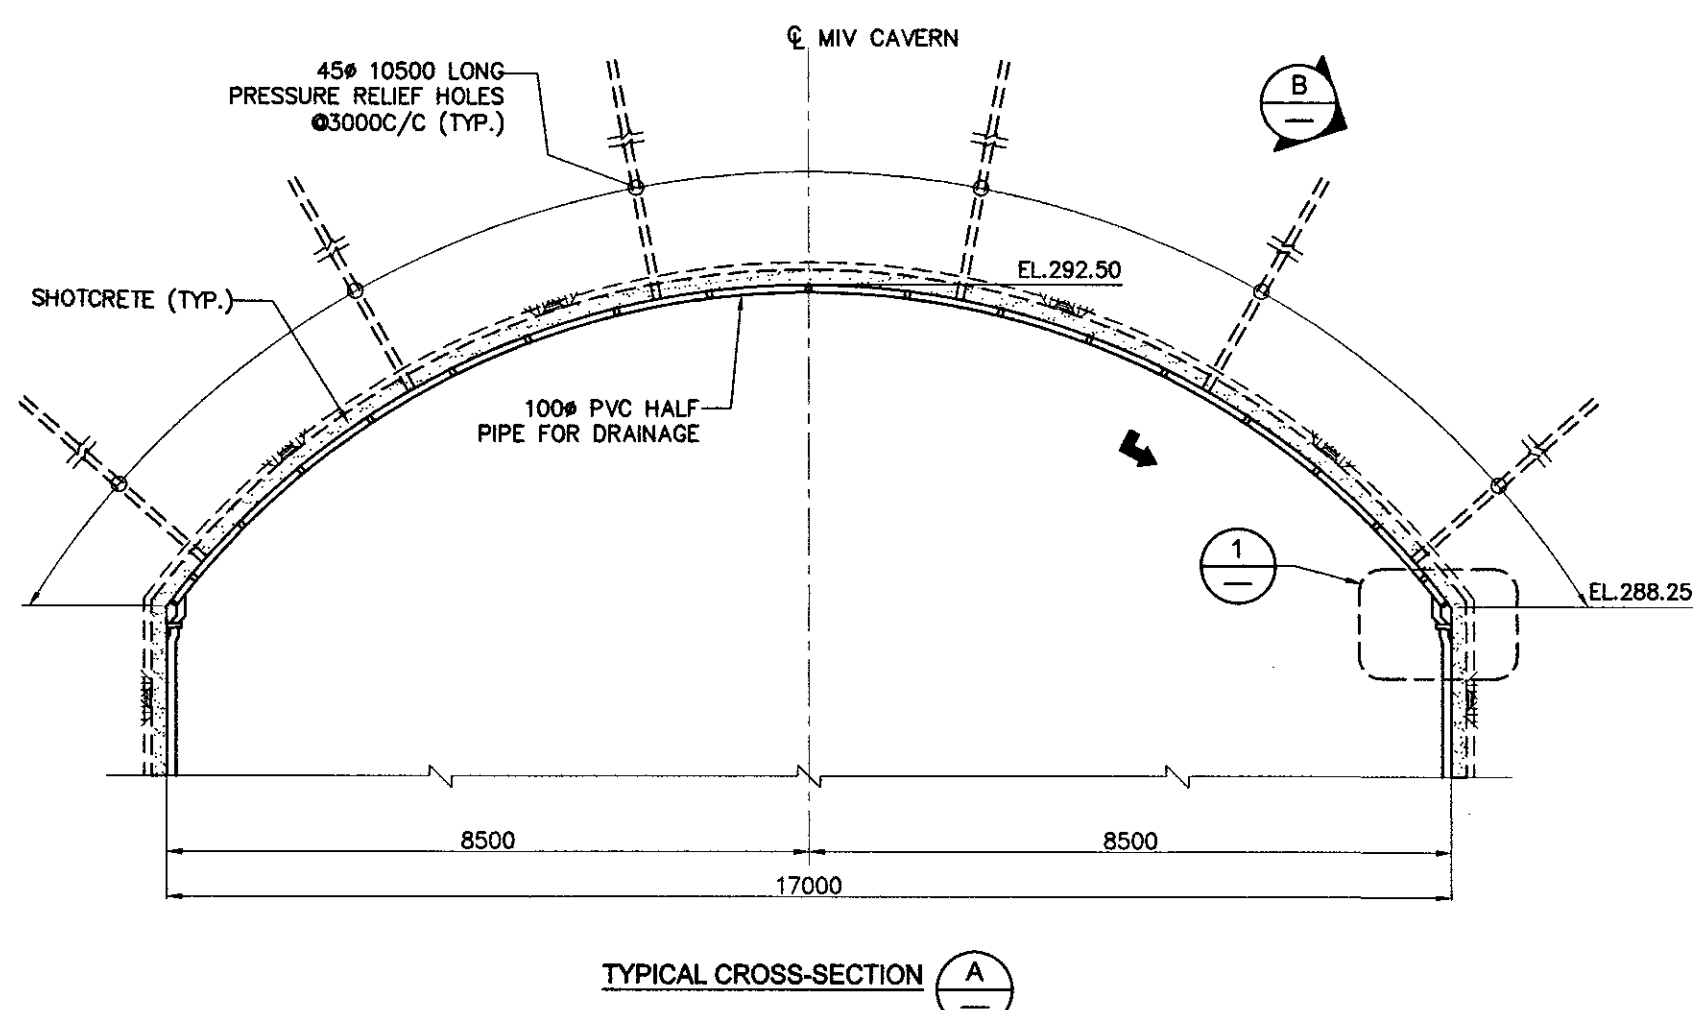

#### REFERENCE DRAWING:

- NHDB-4FC4-41-DD-1002.
- NHDB-4FC4-41-DD-1003.
- NHDB-4FC4-41-DD-7001.



<p>एन एच सी लिमिटेड (एन एच सी लिमिटेड का एक नया/पुराना ब्रह्म) NHPC Limited (A GOVT. OF INDIA MAURITIUS ENTERPRISE)</p>	
<p>दिबांग बहुउद्देशीय परियोजना DIBANG MULTIPURPOSE PROJECT</p>	
<p>MIV CAVERN CROWN - DRAINAGE ARRANGEMENT PLAN AND SECTIONS</p>	
<p>06.06.2025 00</p>	<p>ISSUED FOR CONSTRUCTION</p>
<p>DATE NO.</p>	<p>REVISION OR ISSUES</p>
<p>DESIGN MEMO NO. दिबांग में संचालित</p>	<p>DATE JUN. 2025 DRG. NO. NHDB 4FC4 41 DD 1004 00</p>